


### Features

Features	Code
Brake Caliper	D
Mounting to the machine, can be made either parallel or at the right angles to the brake disc	U
Frame size 060	060
Pneumatically activated	P
Spring released	F
Manual adjustment to counter friction block wear	M
Thrusters 660 or 680 are available for selection	660 680
Thruster mounted right or left available	R L
For brake discs with thicknesses W of 25 mm or 40 mm	25 40

### Example for ordering


Brake Caliper DU 060 PFM, thruster 680, thruster mounted right, thickness of brake disc 25 mm:

DU 060 PFM - 680 R - 25


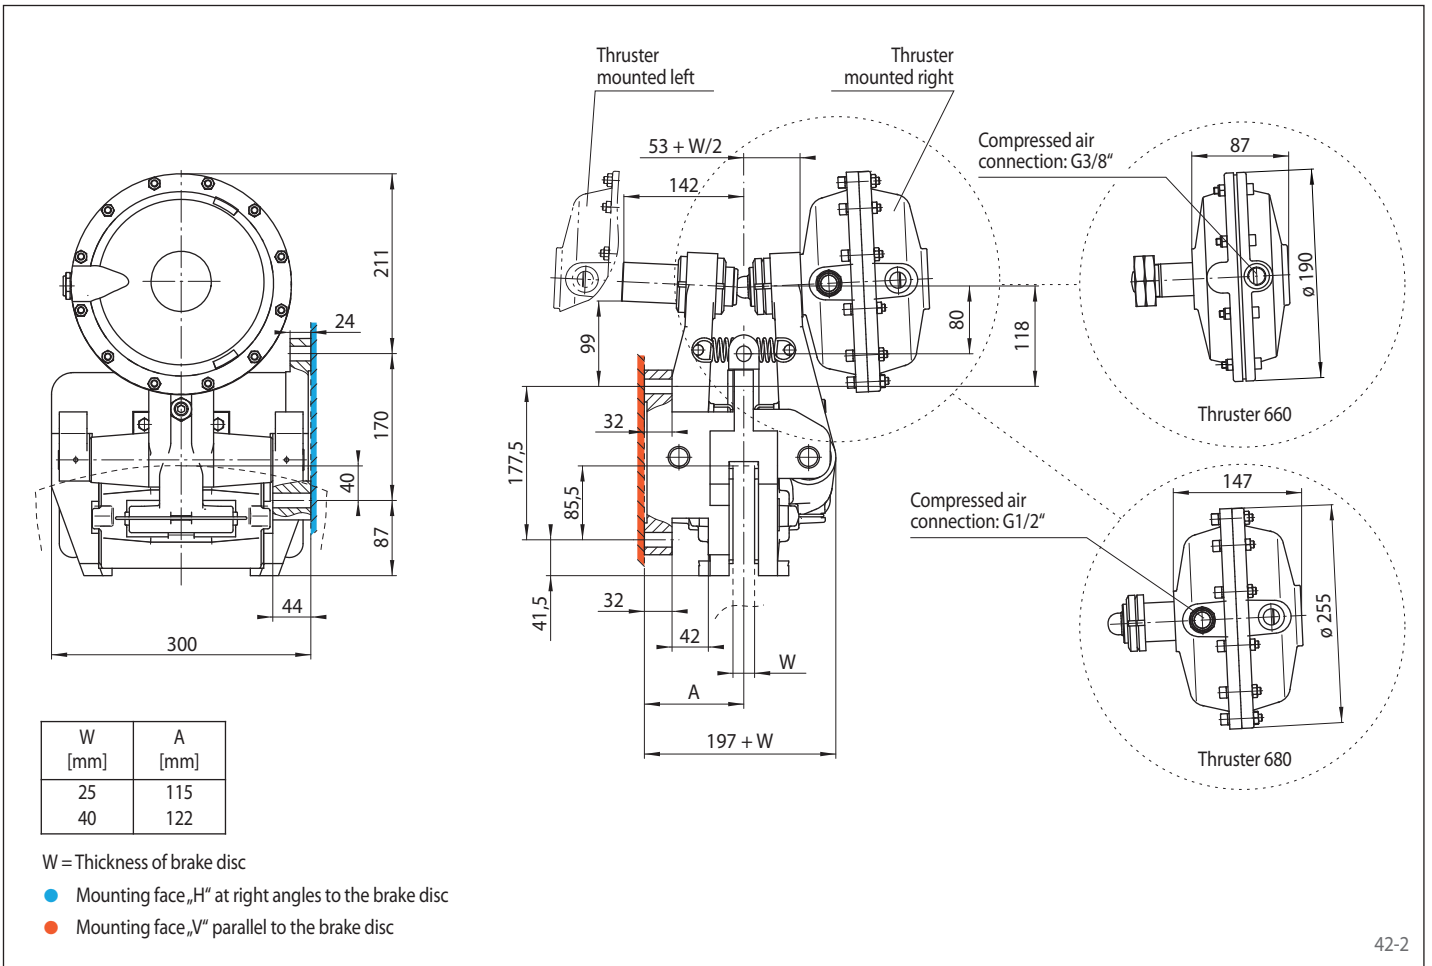


# Brake Caliper DU 060 PFM

pneumatically activated – spring released

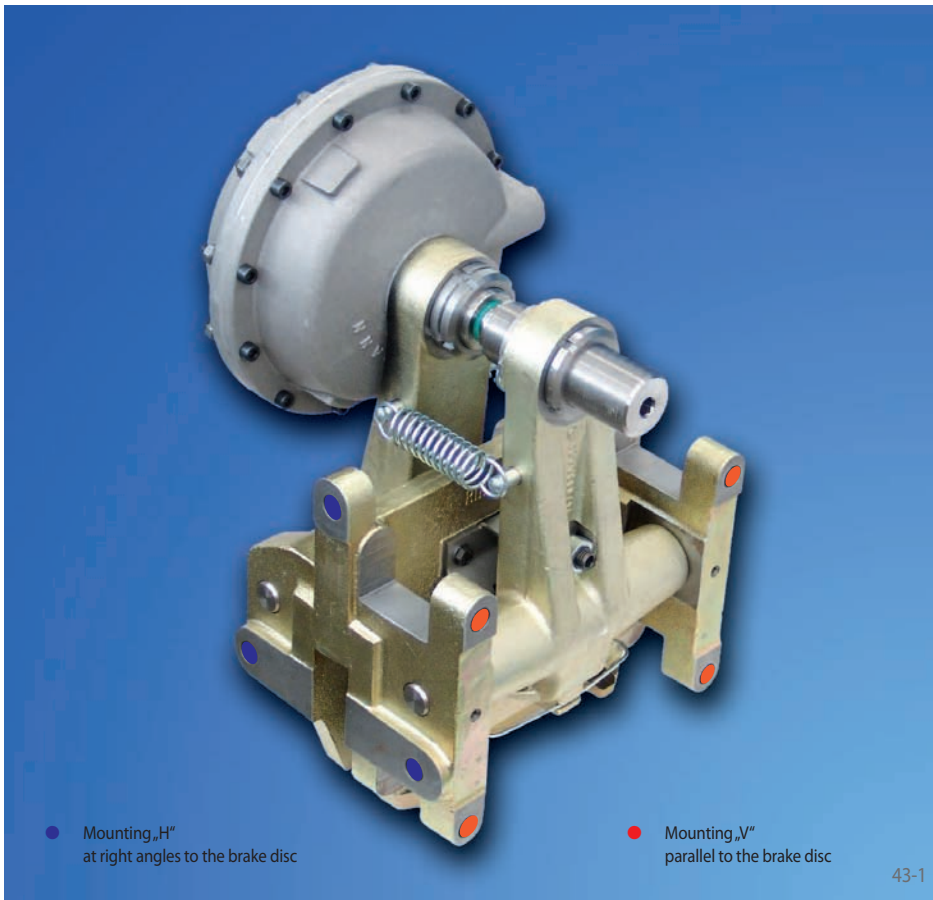


## Frame Design

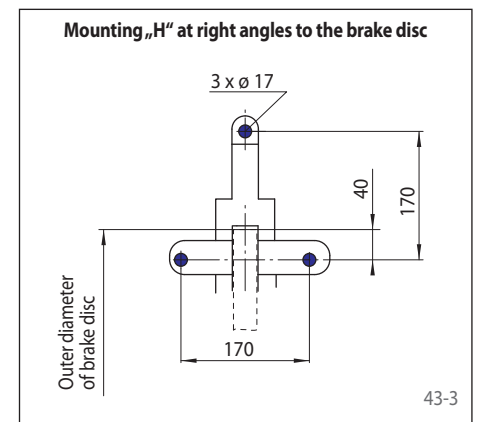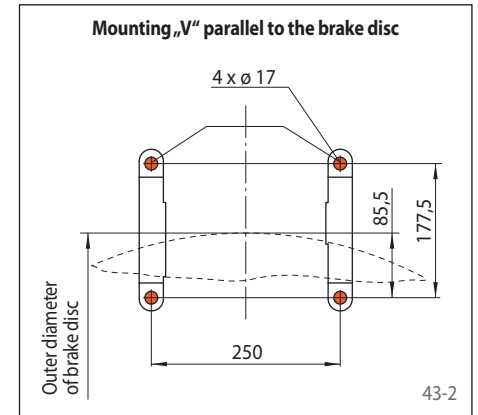

## Technical Data

Brake Caliper DU 060 PFM - 660

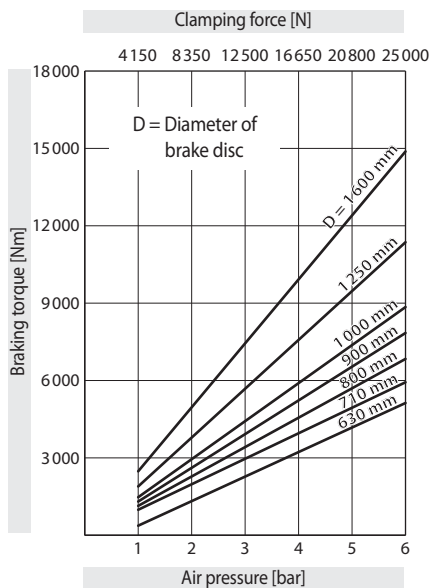


The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

Air pressure: max. 6 bar

Air volume: max. 280 cm<sup>3</sup>  
per activation

Weight: 54 kg

Brake Caliper DU 060 PFM - 680

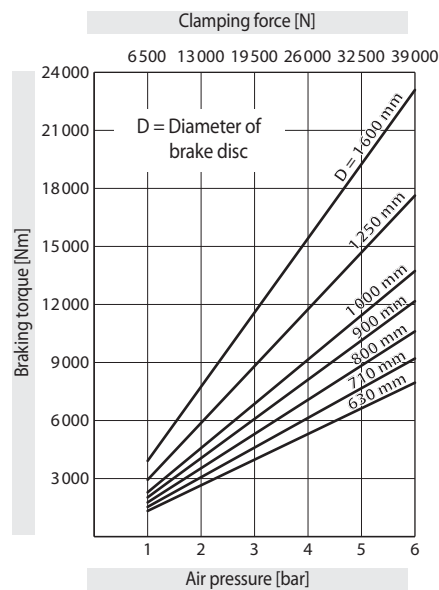

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

Air pressure: max. 6 bar

Air volume: max. 2000 cm<sup>3</sup>  
per activation

Weight: 56 kg